
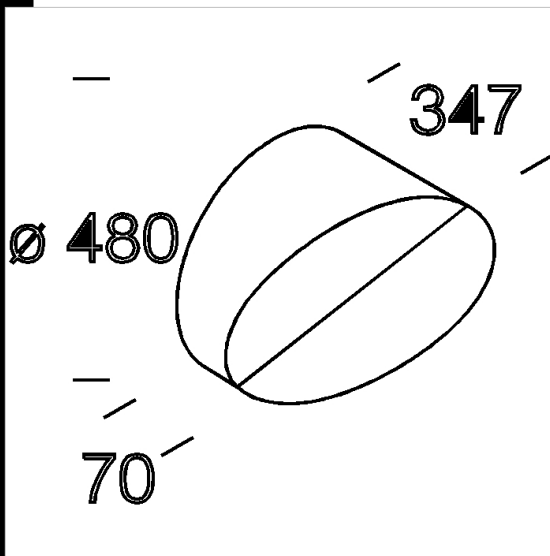


112 Convogliatore

In acciaio verniciato per cataforesi epossidica. Permette di convogliare il fascio luminoso in un'unica direzione.  
Può essere installato con l'acc. 111.

Download

DXF 2D  
- d112.dxf

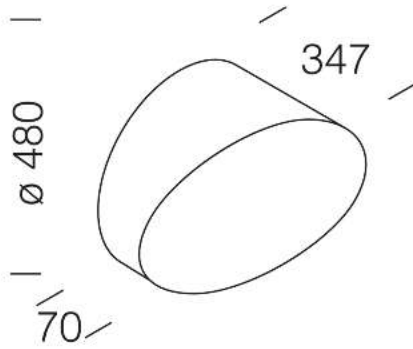

Code	Kg	WTot
995725-00	0,71	0 W

Prodotti



- 1156 Forum - FL



- 1156 Forum - FM



- 1156 Forum - FS



- 1156 Forum - XL



- 1156 Forum - XS



- 1156 Forum - XL indoor



- 1186 Forum - XS High Performance



- 1186 Forum - FS High Performance



- 1186 Forum - FM High Performance



- 1186 Forum - XL High Performance



- 1186 Forum - XL indoor High Performance



- 1195 Forum - XS Riaccensione a caldo



- 1195 Forum - FS Riaccensione a caldo



- 1195 Forum - FM Riaccensione a caldo



- 1195 Forum - FL Riaccensione a caldo



- 1195 Forum - XL Riaccensione a caldo



- 1195 Forum - XL indoor



- 1186 Forum - FL High

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated